



Applications :

- CATV
- Telecommunication networks
- Active device termination
- Metro
- Local Area Networks (LANs)
- Data processing network
- Test equipment
- Premise installations
- Wide Area Networks (WANs)
- FTTX

Features :


- Low insertion loss and back reflection loss
- Good exchangeability
- Good durability
- High temperature stability
- Standard : Telcordia GR-326-CORE, ITU-T

Availability :

- Simplex/Duplex patch cord available
- Various boot (Cable) size available

Specifications :

Parameter	Singlemode	Multimode
Insertion Loss	UPC \leq 0.2 dB, APC \leq 0.3 dB	\leq 0.3 dB
Return Loss	UPC \geq 50 dB, APC \geq 60 dB	N/A
Fiber Type	G.652D, G.655, G.657A2, G.657B3	OM2, OM3, OM4, OM5
Fiber Core/Cladding	9/125 μ m	50/125 μ m
Polishing Grade	UPC, APC	UPC
Wavelength	1310/1550 nm	850/1310 nm
Repeatability	\leq 0.1 dB	
Durability	\leq 0.2 dB typical change, 500 matings	
Interchangeability	\leq 0.2 dB	
Tensile Strength	$>$ 10 kg	
Cable Diameter	2.0, 2.4, 3.0 mm	
Cable Jacket	PVC, LSZH (Low Smoke Zero Halogen)	
Operation Temperature	-40 to +75°C	

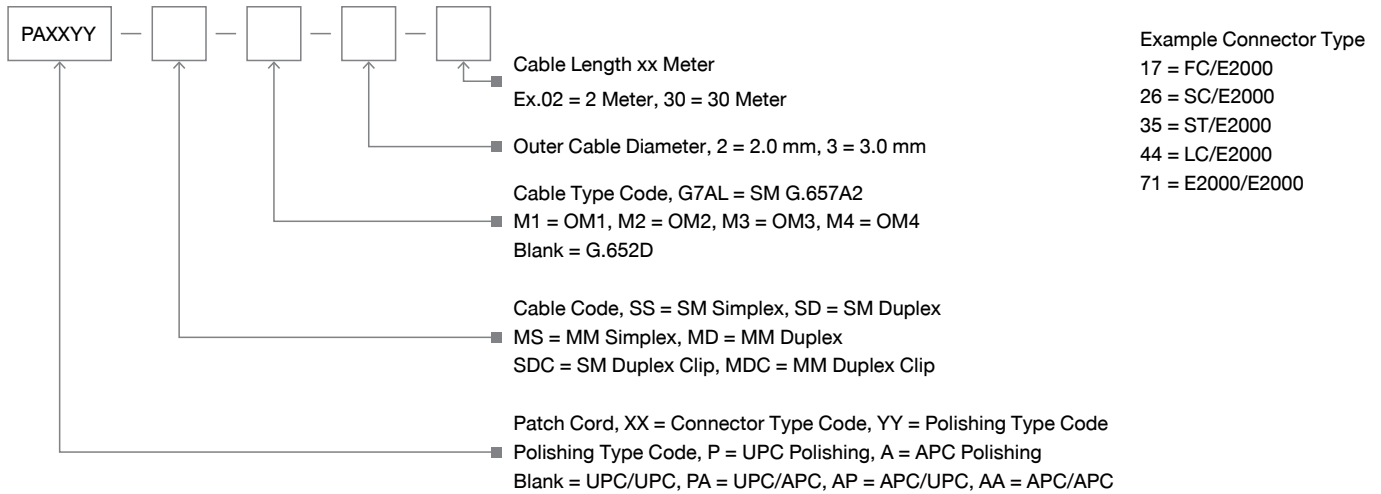

Ordering Information :

P/N	Descriptions
PA71-SD-G7AL-2-05	Patch Cord E2000/E2000 SM G657A2 DX2 LS 5M
PA71-SS-G7AL-2-05	Patch Cord E2000/E2000 SM G657A2 SX2 LS 5M
PA71AA-SD-G7AL-2-05	Patch Cord E2000A/E2000A SM G657A2 DX2 LS 5M
PA71AA-SS-G7AL-2-05	Patch Cord E2000A/E2000A SM G657A2 SX2 LS 5M
PA71AA-SS-G7AL-3-05	Patch Cord E2000A/E2000A SM G657A2 SX3 LS 5M

Connector Type E2000 = E2000 UPC, E2000A = E2000 APC, Cable Type SM = Singlemode Fiber, MM = Multimode Fiber
DX2 = Duplex 2.0 mm. Cable, DX3 = Duplex 3.0 mm. Cable, SX2 = Simplex 2.0 mm. Cable, SX3 = Simplex 3.0 mm. Cable, LSZH = Low Smoke Zero Halogen