

## ALFA 1 Series (IP55)



P/N : WOA A24F



P/N : WOA B48F



P/N : WOA A120F

### Applications :

- Interface and distribute the fiber optical communication system

### Features :

- Aluminum Cabinet wall/pole mount for outdoor application
- Cabinet made from aluminum 1.5 mm thickness
- Combine splicing function, storing of fiber optical cable, patch cord and pigtail
- Store and protect excess optical cable and patch cord
- Support FC/SC/ST/LC adapter type with single slide snap plate
- Splicing and distribution 12 fibers or 24 fibers per tray
- Support fiber bending radius 30 mm
- Nice shape, easy installment and maintenance
- Easily fixed by bolt, convenient for operation and inspection
- Provide strength member holder to fix the main fiber cable
- Light gray cabinet
- Steel cabinet as optional
- Accept custom design and special order

### Standard :


- Manufactured by ISO 9001-2015 company
- EEI tested and approved for IP55
- Meet AIS DTAC True requirements

### Accessories :

- Cable tie, water proof connector
- Rear supporting bracket (without bolt)
- Adapter, pigtail, splice tray and fusion sleeve as optional

### Dimensions :

- WOA A24F : 340 W x 120 D x 400 H mm
- WOA B48F : 420 W x 143 D x 430 H mm
- WOA A120F : 440 W x 200 D x 540 H mm

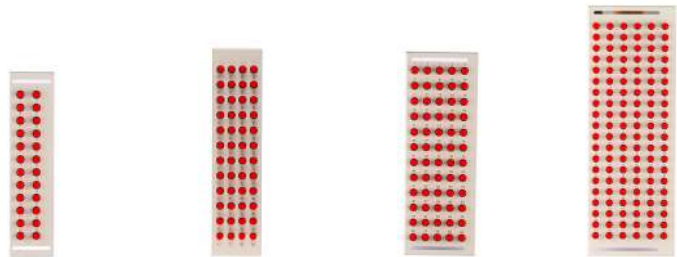

P/N : SNP-S-24FC

P/N : SNP-S-48FC

P/N : SNP-S-60FC

P/N : SNP-S-120FC

### Adapter Capacity :

P/N	Dimensions (mm)			Maximum Fiber Cores	Snap Plate Type	Connector Type
	W	D	H			
WOA A24F	340	120	400	24-48F (Snap Plate Slide 24 FC or SC)	Snap plate 24 (24F)	FC/ST/SC/E2000
					Snap plate 24 (48F)	LC Duplex SCF
WOA B48F	420	143	430	48-120F (Snap Plate Slide 48 FC or SC Snap Plate Slide 60 FC or SC)	Snap plate 48 (48F)	FC/ST/SC/E2000
					Snap plate 48 (96F)	LC Duplex SCF
					Snap plate 60 (60F)	FC/ST/SC/E2000
					Snap plate 60 (120F)	LC Duplex SCF
WOA A120F	440	200	540	120-240F (Snap Plate Slide 120 FC or SC)	Snap plate 120 (120F)	FC/ST/SC/E2000
					Snap plate 120 (240F)	LC Duplex SCF

### Ordering Information :

P/N	Descriptions
WOA A24F	ODF Wall O/D AL 24F (24-48F) Size 340x120x400 mm
WOA B48F	ODF Wall O/D AL 48F (48-120F) Size 420x143x430 mm
WOA A120F	ODF Wall O/D AL 120F (120-240F) Size 440x200x540 mm