


SHIELDED UNLOAD PATCH PANEL 19" 1U 24 PORT

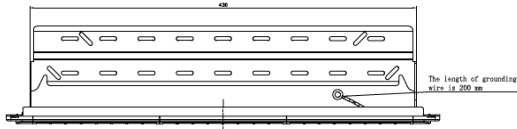

P/N : AL-4196S

Applications :

- 1000 BASE-T (IEEE 802.3ab Gigabit Ethernet)
- 100 BASE-TX (IEEE 802.3u Fast Ethernet)
- 10 BASE-T (IEEE 802.3 Ethernet)
- 52/155/622Mbps and 1.2Gbps ATM
- 4/16 Mbps Token Ring
- POE (IEEE 802.3af, IEEE 802.3at)
- TP-PMD, TPDDI, ISDN, VoIP
- Baseband, broadband
- Analog & digital voice, digital & analog video

Specifications :

- All-metal accessories, the bracket comes with grounding cable to maximize the grounding capacity, which can effectively protect electromagnetic interference and radio frequency interference and provide excellent alien crosstalk suppression
- Full working area with universal shielding module, easy disassembly and tool free termination
- Support shielded and unshielded modules free transfer
- Support CAT5E/CAT6/CAT6A RJ45 female connector or In-line coupler
- Back bar management
- ID Label
- Insertion life: 1000 times
- Humidity: 10% to 90% RH
- Rated temperature: -20 ~ 70 °C
- Dimension: Height 1U 48.26 cm (W) x 8.89 cm (D)

Ordering Information :

P/N	Descriptions
AL-4196S	Shielded Unload Patch Panel 19" 1U 24 Port w/ Label, Back Bar Support "ALFA BASE"

SHIELDED CAT6 RJ45 IN-LINE COUPLER (FEMALE-FEMALE)



P/N : AL-3121S

Applications :

- 10 BASE-T (IEEE 802.3)
- 100 BASE-TX (IEEE 802.3U)
- 1000 Base - T (IEEE 802.3ab)
- Data center, VoIP, ISDN, POE, CCTV and others

Standards :

- ANSI/TIA-568-C.2 Category 6
- ISO IEC-11801:2017 Class EA
- EN55032:2015
- EN55024:2010+A1:2015
- IEEE 802.3an (10G Base T)
- EMC compliant
- RoHS compliant

Specifications :

- Voltage rating : 125 VAC RMS
- Current rating : 1.5 A
- Contact resistance : 100 mΩ (Max)
- Insulation resistance : 1000 MΩ (Min) @500 VDC
- Dielectric strength : 750 VAC RMS 60Hz, 1min
- Operation temperature : 0-70 °C

Ordering Information :

P/N	Descriptions
AL-3121S	Shielded CAT6 RJ45 In-Line Coupler "ALFA BASE"