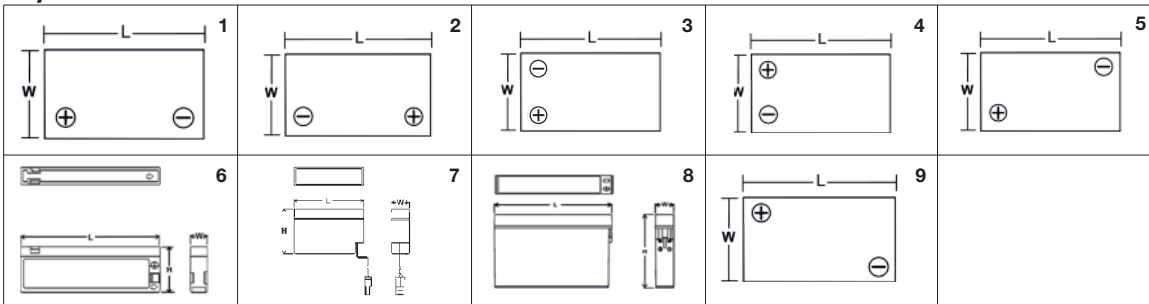


















Powerful solutions for industrial applications

Layout Illustration



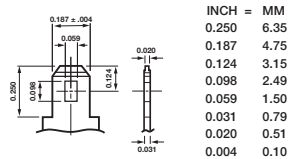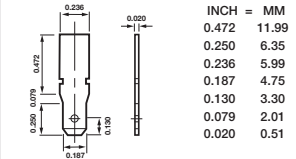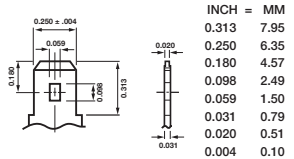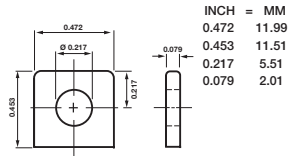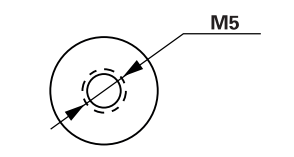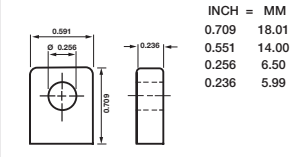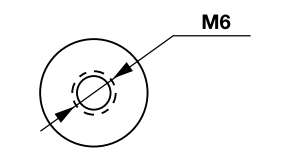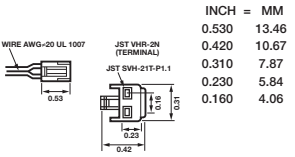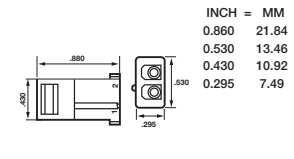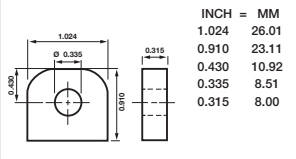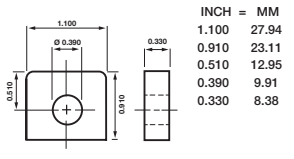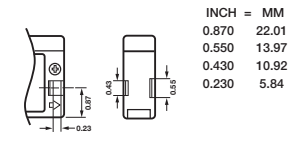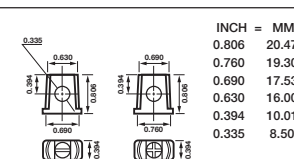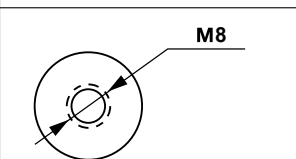Terminal Illustration

 <p>Faston Tab: 187 A</p> <table border="1"> <thead> <tr> <th>INCH</th> <th>MM</th> </tr> </thead> <tbody> <tr><td>0.250</td><td>6.35</td></tr> <tr><td>0.187</td><td>4.75</td></tr> <tr><td>0.124</td><td>3.15</td></tr> <tr><td>0.098</td><td>2.49</td></tr> <tr><td>0.059</td><td>1.50</td></tr> <tr><td>0.031</td><td>0.79</td></tr> <tr><td>0.020</td><td>0.51</td></tr> <tr><td>0.004</td><td>0.10</td></tr> </tbody> </table>	INCH	MM	0.250	6.35	0.187	4.75	0.124	3.15	0.098	2.49	0.059	1.50	0.031	0.79	0.020	0.51	0.004	0.10	 <p>Faston Tab: 187 B</p> <table border="1"> <thead> <tr> <th>INCH</th> <th>MM</th> </tr> </thead> <tbody> <tr><td>0.472</td><td>11.99</td></tr> <tr><td>0.250</td><td>6.35</td></tr> <tr><td>0.236</td><td>5.99</td></tr> <tr><td>0.187</td><td>4.75</td></tr> <tr><td>0.130</td><td>3.30</td></tr> <tr><td>0.079</td><td>2.01</td></tr> <tr><td>0.020</td><td>0.51</td></tr> </tbody> </table>	INCH	MM	0.472	11.99	0.250	6.35	0.236	5.99	0.187	4.75	0.130	3.30	0.079	2.01	0.020	0.51	 <p>Faston Tab: 250 C</p> <table border="1"> <thead> <tr> <th>INCH</th> <th>MM</th> </tr> </thead> <tbody> <tr><td>0.313</td><td>7.95</td></tr> <tr><td>0.250</td><td>6.35</td></tr> <tr><td>0.180</td><td>4.57</td></tr> <tr><td>0.098</td><td>2.49</td></tr> <tr><td>0.059</td><td>1.50</td></tr> <tr><td>0.031</td><td>0.79</td></tr> <tr><td>0.020</td><td>0.51</td></tr> <tr><td>0.004</td><td>0.10</td></tr> </tbody> </table>	INCH	MM	0.313	7.95	0.250	6.35	0.180	4.57	0.098	2.49	0.059	1.50	0.031	0.79	0.020	0.51	0.004	0.10	 <p>M5 Bolt Fastened Terminal D</p> <table border="1"> <thead> <tr> <th>INCH</th> <th>MM</th> </tr> </thead> <tbody> <tr><td>0.472</td><td>11.99</td></tr> <tr><td>0.453</td><td>11.51</td></tr> <tr><td>0.217</td><td>5.51</td></tr> <tr><td>0.079</td><td>2.01</td></tr> </tbody> </table>	INCH	MM	0.472	11.99	0.453	11.51	0.217	5.51	0.079	2.01
INCH	MM																																																																
0.250	6.35																																																																
0.187	4.75																																																																
0.124	3.15																																																																
0.098	2.49																																																																
0.059	1.50																																																																
0.031	0.79																																																																
0.020	0.51																																																																
0.004	0.10																																																																
INCH	MM																																																																
0.472	11.99																																																																
0.250	6.35																																																																
0.236	5.99																																																																
0.187	4.75																																																																
0.130	3.30																																																																
0.079	2.01																																																																
0.020	0.51																																																																
INCH	MM																																																																
0.313	7.95																																																																
0.250	6.35																																																																
0.180	4.57																																																																
0.098	2.49																																																																
0.059	1.50																																																																
0.031	0.79																																																																
0.020	0.51																																																																
0.004	0.10																																																																
INCH	MM																																																																
0.472	11.99																																																																
0.453	11.51																																																																
0.217	5.51																																																																
0.079	2.01																																																																
 <p>M5 Threaded Receptacle E</p>	 <p>M6 Bolt Fastened Terminal F</p> <table border="1"> <thead> <tr> <th>INCH</th> <th>MM</th> </tr> </thead> <tbody> <tr><td>0.709</td><td>18.01</td></tr> <tr><td>0.551</td><td>14.00</td></tr> <tr><td>0.256</td><td>6.50</td></tr> <tr><td>0.236</td><td>5.99</td></tr> </tbody> </table>	INCH	MM	0.709	18.01	0.551	14.00	0.256	6.50	0.236	5.99	 <p>M6 Threaded Receptacle G</p>	 <p>JST No. VHR-2N H</p> <table border="1"> <thead> <tr> <th>INCH</th> <th>MM</th> </tr> </thead> <tbody> <tr><td>0.530</td><td>13.46</td></tr> <tr><td>0.420</td><td>10.67</td></tr> <tr><td>0.310</td><td>7.87</td></tr> <tr><td>0.230</td><td>5.84</td></tr> <tr><td>0.160</td><td>4.06</td></tr> </tbody> </table>	INCH	MM	0.530	13.46	0.420	10.67	0.310	7.87	0.230	5.84	0.160	4.06																																								
INCH	MM																																																																
0.709	18.01																																																																
0.551	14.00																																																																
0.256	6.50																																																																
0.236	5.99																																																																
INCH	MM																																																																
0.530	13.46																																																																
0.420	10.67																																																																
0.310	7.87																																																																
0.230	5.84																																																																
0.160	4.06																																																																
 <p>Tyco. 1-480318-0 I</p> <table border="1"> <thead> <tr> <th>INCH</th> <th>MM</th> </tr> </thead> <tbody> <tr><td>0.860</td><td>21.84</td></tr> <tr><td>0.530</td><td>13.46</td></tr> <tr><td>0.430</td><td>10.92</td></tr> <tr><td>0.295</td><td>7.49</td></tr> </tbody> </table>	INCH	MM	0.860	21.84	0.530	13.46	0.430	10.92	0.295	7.49	 <p>M8 Bolt Fastened Terminal J</p> <table border="1"> <thead> <tr> <th>INCH</th> <th>MM</th> </tr> </thead> <tbody> <tr><td>1.024</td><td>26.01</td></tr> <tr><td>0.910</td><td>23.11</td></tr> <tr><td>0.430</td><td>10.92</td></tr> <tr><td>0.335</td><td>8.51</td></tr> <tr><td>0.315</td><td>8.00</td></tr> </tbody> </table>	INCH	MM	1.024	26.01	0.910	23.11	0.430	10.92	0.335	8.51	0.315	8.00	 <p>M10 Bolt Fastened Terminal K</p> <table border="1"> <thead> <tr> <th>INCH</th> <th>MM</th> </tr> </thead> <tbody> <tr><td>1.100</td><td>27.94</td></tr> <tr><td>0.910</td><td>23.11</td></tr> <tr><td>0.510</td><td>12.95</td></tr> <tr><td>0.390</td><td>9.91</td></tr> <tr><td>0.330</td><td>8.38</td></tr> </tbody> </table>	INCH	MM	1.100	27.94	0.910	23.11	0.510	12.95	0.390	9.91	0.330	8.38	 <p>"Camcorder" Terminal L</p> <table border="1"> <thead> <tr> <th>INCH</th> <th>MM</th> </tr> </thead> <tbody> <tr><td>0.870</td><td>22.01</td></tr> <tr><td>0.550</td><td>13.97</td></tr> <tr><td>0.430</td><td>10.92</td></tr> <tr><td>0.230</td><td>5.84</td></tr> </tbody> </table>	INCH	MM	0.870	22.01	0.550	13.97	0.430	10.92	0.230	5.84																		
INCH	MM																																																																
0.860	21.84																																																																
0.530	13.46																																																																
0.430	10.92																																																																
0.295	7.49																																																																
INCH	MM																																																																
1.024	26.01																																																																
0.910	23.11																																																																
0.430	10.92																																																																
0.335	8.51																																																																
0.315	8.00																																																																
INCH	MM																																																																
1.100	27.94																																																																
0.910	23.11																																																																
0.510	12.95																																																																
0.390	9.91																																																																
0.330	8.38																																																																
INCH	MM																																																																
0.870	22.01																																																																
0.550	13.97																																																																
0.430	10.92																																																																
0.230	5.84																																																																
 <p>M8 'Universal' Bolt Fastened Terminal M</p> <table border="1"> <thead> <tr> <th>INCH</th> <th>MM</th> </tr> </thead> <tbody> <tr><td>0.806</td><td>20.47</td></tr> <tr><td>0.760</td><td>19.30</td></tr> <tr><td>0.690</td><td>17.53</td></tr> <tr><td>0.630</td><td>16.00</td></tr> <tr><td>0.394</td><td>10.01</td></tr> <tr><td>0.335</td><td>8.50</td></tr> </tbody> </table>	INCH	MM	0.806	20.47	0.760	19.30	0.690	17.53	0.630	16.00	0.394	10.01	0.335	8.50	 <p>M8 Threaded Receptacle N</p>	<p>Note: Dimensions are in inches (mm) Tolerances are: ± 0.02 in. for dimensions < 5mm ± 0.04 in. for dimensions ≥ 5mm ± 0.08 in. for all height dimensions unless otherwise specified.</p>																																																	
INCH	MM																																																																
0.806	20.47																																																																
0.760	19.30																																																																
0.690	17.53																																																																
0.630	16.00																																																																
0.394	10.01																																																																
0.335	8.50																																																																

Charging

- Standby use: Apply constant voltage charging at 2.275 volts per cell (or 2.25–2.30VPC).
- Cyclic use: Apply constant voltage charging at 2.40-2.50 VPC. Initial charging current should be set at less than 0.25CA.
- Top charge: Product in storage (ambient temperature 25°C/77°F) requires a top charge every six months. Apply constant voltage at 2.40 volts per cell, initial charging current should be set at less than 0.1CA for 15 to 20 hours.

Discharge

- Stop operation when voltage has reached the minimum permissible voltage (1.6Vpc). Recharge immediately.
- Do not operate at 3CA or more current continuously.

Storage

- Always store battery in a fully charged condition.
- If battery is to be stored for a long period, apply a recovery top-charge every 6 months.
- Store batteries in a dry and cool location.

Temperature

- Keep within ambient temperatures of -15°C to +50°C for both charging and discharging.

Incorporating battery into equipment

- Encase battery in a well ventilated compartment.
- Avoid installing battery near heated units such as a transformer.
- House the battery in the lowest section of the equipment enclosure or rack to prevent unnecessary battery temperature rise.
- It is not recommended to install/operate the battery in the inverted position.

Others

- Avoid terminal short circuit.
- DO NOT expose to open flame.
- WARNING - Avoid exposure of the battery to any type of oil, solvent, detergent, petroleum-based solvent or ammonia solution. These materials could potentially cause permanent damage to the battery jar and cover and will void the warranty.

General Specifications

Genesis® NPH Battery Series

Battery Type	FR Type*	Volts	Nominal Capacity (10hr rate-Ah)	Length		Width		Overall Height (inc. terminals)		Weight		Layout (including terminals)	^Terminal Illus. (US Region)	^Terminal Illus. (EMEA & Asia Region)
				mm	(in.)	mm	(in.)	mm	(in.)	kgs.	(lbs)			
NPH3.2-12	NPH3.2-12FR	12	3.2	134	5.28	67	2.64	64	2.52	1.38	3.05	3	A/C	-

Genesis® NP Battery Series

Battery Types	FR Type*	Volts	Nominal Capacity (20hr rate-Ah)	Length		Width		Overall Height (inc. terminals)		Weight		Layout (including terminals)	^Terminal Illus. (US region)	^Terminal Illus. (EMEA & Asia Region)
				mm	(in.)	mm	(in.)	mm	(in.)	kgs.	(lbs)			
NP1-6	NP1-6FR	6	1.0	51	2.01	42	1.65	57	2.24	0.28	0.61	5	A	-
NP1.2-6	NP1.2-6FR	6	1.2	97	3.82	25	0.98	56	2.20	0.30	0.67	1	A	A
NP2.8-6	NP2.8-6FR	6	2.8	67	2.64	33	1.30	105	4.13	0.59	1.30	5	A/C	A
NP3-6	NP3-6FR	6	3.0	134	5.28	33	1.30	67	2.64	0.69	1.53	1	A	A
NP3.2-6	NP3.2-6FR	6	3.2	66	2.60	33	1.30	104	4.09	0.59	1.30	5	A	-
NP3.8-6	NP3.8-6FR	6	3.8	66	2.60	33	1.30	125	4.92	0.75	1.65	1	A	-
NP4-6	NP4-6FR	6	4.0	70	2.76	47	1.85	105	4.15	0.80	1.76	5	A/C	A
NP4.5-6	NP4.5-6FR	6	4.5	70	2.76	47	1.85	105	4.15	0.86	1.90	5	A/C	-
NP5-6	NP5-6FR	6	5.0	70	2.76	47	1.85	105	4.15	0.95	2.10	5	A/C	-
NP7-6	NP7-6FR	6	7.0	151	5.95	33	1.30	100	3.94	1.28	2.83	1	A/C	A
NP8.5-6	NP8.5-6FR	6	8.5	98	3.86	56	2.20	118	4.65	1.60	3.53	9	A/C	-
NP10-6	NP10-6FR	6	10.0	151	5.95	50	1.97	101	3.98	1.99	4.38	1	A/C	A
NP12-6	NP12-6FR	6	12.0	151	5.95	50	1.97	101	3.98	2.03	4.48	1	A/C	C
NP0.8-12	NP0.8-12FR	12	0.8	96	3.78	25	0.98	61	2.42	0.37	0.82	7	H/I	H/I
NP1.2-12	NP1.2-12FR	12	1.2	97	3.82	48	1.89	56	2.20	0.57	1.25	3	A	A
NP2-12	NP2-12FR	12	2.0	150	5.91	20	0.79	89	3.50	0.70	1.54	8	B	B
NP2-12-C	NP2-12CFR	12	2.0	182	7.17	24	0.93	61	2.40	0.73	1.61	6	L	L
NP2.3-12	NP2.3-12FR	12	2.3	178	7.01	35	1.38	67	2.64	0.98	2.15	1	A	A
NP2.6-12	NP2.6-12FR	12	2.6	134	5.28	67	2.64	66	2.60	1.36	3.00	3	A	-
NP2.9-12	NP2.9-12FR	12	2.9	79	3.11	56	2.20	105	4.13	1.24	2.73	1	A/C	A
NP3-12	NP3-12FR	12	3.0	132	5.20	33	1.30	105	4.13	1.18	2.60	1	A/C	-
NP3.4-12	NP3.4-12FR	12	3.4	134	5.28	67	2.64	67	2.64	1.39	3.06	3	A/C	A
NP4-12	NP4-12FR	12	4.0	90	3.54	70	2.76	107	4.21	1.70	3.74	1	A/C	-
NP4.5-12	NP4.5-12FR	12	4.5	90	3.54	70	2.76	107	4.21	1.76	3.88	1	A/C	-
NP5-12	NP5-12FR	12	5.0	90	3.54	70	2.76	107	4.21	1.81	4.00	1	A/C	A/C
NP7-12	NP7-12FR	12	7.0	151	5.95	65	2.56	100	3.94	2.59	5.72	4	A/C	A/C
NP9-12	NP9-12FR	12	9.0	151	5.94	65	2.56	102	4.02	2.72	6.00	4	C/D	C
NP9.5-12	NP9.5-12FR	12	9.5	151	5.94	65	2.56	118	4.64	3.28	7.23	4	-	A/C
NP10-12	NP10-12FR	12	10.0	151	5.94	98	3.86	100	3.93	3.39	7.47	4	-	A
NP12-12	NP12-12FR	12	12.0	151	5.95	98	3.86	100	3.94	4.06	8.95	4	C	C
NP18-12	NP18-12FR	12	17.2	181	7.13	76	3.00	167	6.57	6.17	13.60	2	D/E	E/G
NP24-12	NP24-12FR	12	24.0	166	6.54	175	6.89	125	4.92	9.07	20.00	2	C/D/E	E/G
NP33-12	NP33-12FR	12	33.0	197	7.76	131	5.16	158+	6.22+	11.79	26.00	1	E/F	E/G
NP35-12	NP35-12FR	12	35.0	198	7.80	132	5.20	170	6.69	12.61	27.80	1	F	-
NP38-12	NP38-12FR	12	38.0	197	7.76	165	6.50	172	6.77	14.59	32.16	2	F/G	G
NP55-12	NP55-12FR	12	55.0	229	9.02	138	5.43	207+	8.15+	18.01	39.70	1	M/E	G
NP65-12	NP65-12FR	12	65.0	350	13.78	166	6.54	174	6.85	23.63	52.10	2	F/G	G
NP75-12	NP75-12FR	12	75.0	259	10.20	169	6.65	208+	8.19+	26.50	58.42	1	M/G	G
NP90-12	NP90-12FR	12	90.0	304	11.97	168	6.61	229	9.02	31.18	68.74	1	M/G	G
NP100-12	NP100-12FR	12	100.0	329	12.95	174	6.85	214+	8.43+	32.50	71.65	1	J/G	G
NP120-12	NP120-12FR	12	120.0	407	16.02	173	6.81	235	9.25	38.41	84.68	1	J/G	G
NP150-12	NP150-12FR	12	150.0	483	19.02	170	6.69	241	9.49	44.50	98.11	1	J/G	G
NP200-12	NP200-12FR	12	200.0	522	20.55	240	9.45	218+	8.58+	64.50	142.20	3	K/G	N

DataSafe® NPX Battery Series

Battery Types	FR Type*	Volts	15 minute watts per cell to 1.67Vpc	Nominal Capacity (20hr rate-Ah)	Length		Width (inc. terminals)		Overall Height (inc. terminals)		Weight		Layout	^Terminal Illus. (US Region)	^Terminal Illus. (EMEA & Asia Region)
					mm	(in.)	mm	(in.)	mm	(in.)	kgs.	(lbs)			
NPX-35-6	NPX-35-6FR	6	35W/Cell	8	151	5.95	33	1.30	100	3.94	1.43	3.15	1	A/C	-
NPX-50-6	NPX-50FR	6	50W/Cell	13	151	5.95	50	1.97	100	3.94	2.09	4.60	1	A/C	C
NPX24-12	NPX-24FR	12	24W/Cell	6	151	5.94	51	2.01	100	3.94	2.28	5.02	4	-	neg A pos C
NPX-25-12	NPX-25FR	12	23W/Cell	5	90	3.54	70	2.75	107	4.21	1.95	4.30	1	A/C	C
NPX-35-12	NPX-35FR	12	35W/Cell	8	151	5.95	65	2.56	100	3.94	2.75	6.06	4	A/C	A/C
NPX-80-12	NPX-80FR	12	80W/Cell	20	181	7.13	76	2.39	167	6.57	6.35	14.00	2	D/E	E
NPX-100-12	NPX-100FR	12	95W/Cell	28	166	6.54	125	4.92	175	6.89	9.70	21.38	2	D/E	E
NPX-135-12	NPX-135FR	12	135W/Cell	33	197	7.76	131	5.16	158+	6.22	11.94	26.32	1	E/F	E
NPX-150-12	NPX-150FR	12	150W/Cell	40	197	7.76	165	6.50	172	6.77	14.29	31.50	2	F/G	G

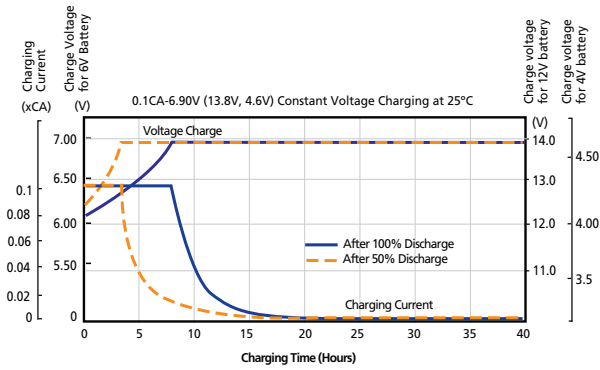
FOOTNOTES:

* FR: UL94-VO, Flame Retardant Case and Cover (Oxygen index 28)
 + Height is to the top of the cover. Overall Height, including terminal is dependent on the terminal configuration
 ^ Terminal availability is subjected to confirmation at point of order
 Recognized by UL File No. MH16464
NOTE: All dimensions are +/- 0.08 inches (2mm); Weights are +/- 5%

Torque Specifications:


M5 bolt: 26.6 lbf.in (3Nm) +/- 5%
 M6 bolt: 44.31 lbf.in (5Nm) +/- 5%
 M5 receptacle: 35.4 lbf.in (4Nm) +/- 5%
 M6 receptacle: 65 lbf.in (6.8Nm) +/- 5%

Charging Characteristics




Float service life NP series

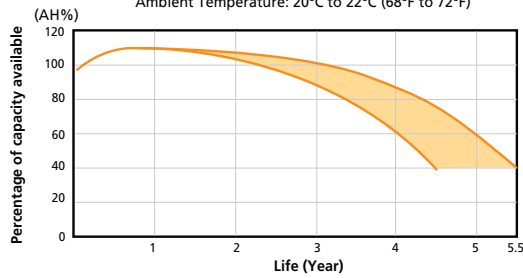Testing conditions: Floating Voltage: 2.25 to 2.30V/Cell
Ambient Temperature: 20°C to 22°C (68°F to 72°F)




Cycle service life in relation to depth of discharge NP series

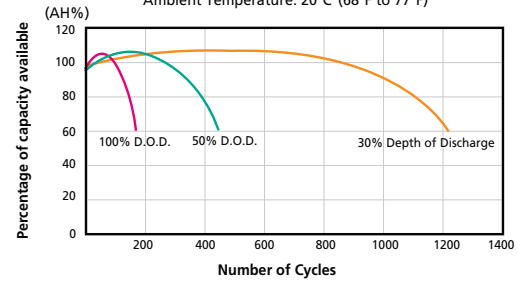Testing conditions: Discharge Current: 0.17C Amp. (F.V. 1.7/Cell)
Charging Current: 0.09C Amp.
Charging Volume: 125% of Discharged Capacity
Ambient Temperature: 20°C (68°F to 77°F)




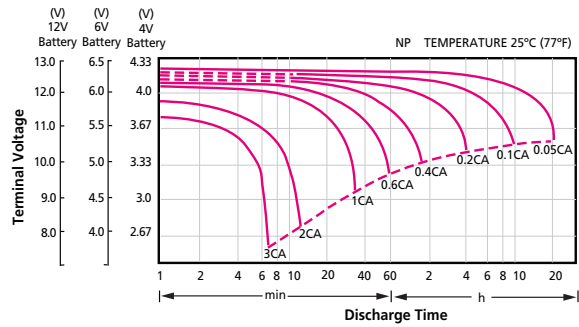Discharge characteristics curves at 25°C (77°F) NP series



If discharge currents in excess of 3CA are required, consult the EnerSys Technical Department prior to use.

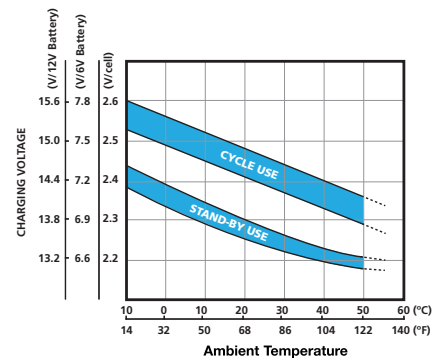Relationship between charging voltage and temperature



www.enersys.com

EnerSys
World Headquarters
2366 Bernville Road
Reading, PA 19605
USA
Tel: +1 610 208 1991
+1 800 538 3627
Fax: +1 610 372 8613

EnerSys EMEA
EH Europe GmbH,
Baarerstrasse 18,
6300 Zug,
Switzerland.
Tel: +41 44 2157410

EnerSys Asia
152 Beach Road
Gateway East Building
Level 11-03
189721 Singapore
Tel: +65 6508 1780

Contact:

© 2016 EnerSys. All rights reserved.
Trademarks and logos are the property of
EnerSys and its affiliates.