


ODF WALL/POLE MOUNT OUTDOOR 24/48/60/144 FIBERS (SLIDE SNAP PLATE)

ALFA 1 Series (IP55)



P/N : ODFWOA24U-V1

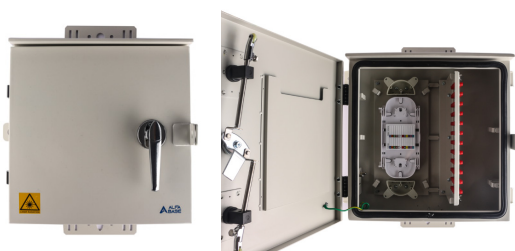


P/N : ODFWOA60U-V1




P/N : ODFWOA144U-V1



P/N : SNPOS2A1US



P/N : SNPOS4A1US



P/N : SNPOS8A1US

Applications :

- Interface and distribute the fiber optical communication system

Features :

- Aluminum Cabinet wall/pole mount for outdoor application
- Cabinet made from aluminum 1.5 mm thickness
- Combine splicing function, storing of fiber optical cable, patch cord and pigtail
- Store and protect excess optical cable and patch cord
- Support FC/SC/ST/LC adapter type with single slide snap plate
- Splicing and distribution 12 fibers or 24 fibers per tray
- Support fiber bending radius 30 mm
- Nice shape, easy installment and maintenance
- Easily fixed by bolt, convenient for operation and inspection
- Provide strength member holder to fix the main fiber cable
- Light gray cabinet
- Steel cabinet as optional
- Accept custom design and special order

Standard :

- Manufactured by ISO 9001-2015 company
- EEI tested and approved for IP55
- Meet AIS DTAC True requirements

Accessories :

- Cable tie, water proof connector
- Rear supporting bracket (without bolt)
- Adapter, pigtail, splice tray and fusion sleeve as optional

Dimensions :

- WOA24U-V1 : 340 W x 128 D x 400 H mm
- WOA60U-V1 : 390 W x 170 D x 480 H mm
- WOA144U-V1 : 440 W x 200 D x 540 H mm

Adapter Capacity :

P/N	Dimensions (mm)			Maximum Fiber Cores	Snap Plate Type	Connector Type
	W	D	H			
ODFWOA24U-V1	340	128	400	24-48F (Snap Plate Slide 24 FC or SC)	Snap plate 24 (24F)	FC/ST/SC/E2000
					Snap plate 24 (48F)	LC Duplex SCF
ODFWOA60U-V1	390	170	480	60-120F (Snap Plate Slide 60 FC or SC)	Snap plate 60 (60F)	FC/ST/SC/E2000
					Snap plate 60 (120F)	LC Duplex SCF
ODFWOA144U-V1	440	200	540	144-288F (Snap Plate Slide 144 FC or SC)	Snap Plate 144 (144F)	FC/ST/SC/E2000
					Snap Plate 144 (288F)	LC Duplex SCF

Ordering Information :


P/N	Descriptions
ODFWOA24U-V1	ODF Wall O/D AL 24F (24-48F) Size 340x128x400 mm
ODFWOA60U-V1	ODF Wall O/D AL 60F (60-120F) Size 390x170x480 mm
ODFWOA144U-V1	ODF Wall O/D AL 144F (144-288F) Size 440x200x540 mm

ODF WALL/POLE MOUNT OUTDOOR 24/48/60/144 FIBERS (SLIDE SNAP PLATE)

ALFA 3 Series (IP65)



P/N : ODFWOA24U-V2

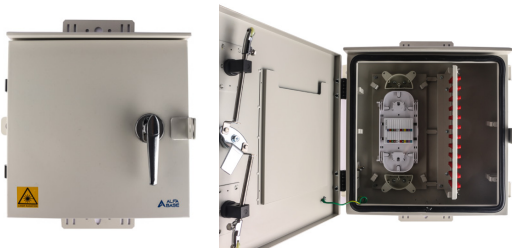

P/N : ODFWOA60U-V2



P/N : ODFWOA144U-V2

Applications :

- Interface and distribute the fiber optical communication system

Features :

- Aluminum Cabinet wall/pole mount for outdoor application
- Cabinet made from aluminum 1.5 mm thickness
- Combine splicing function, storing of fiber optical cable, patch cord and pigtail
- Store and protect excess optical cable and patch cord
- Support FC/SC/ST/LC adapter type with single slide snap plate
- Splicing and distribution 12 fibers or 24 fibers per tray
- Support fiber bending radius 30 mm
- Nice shape, easy installment and maintenance
- Easily fixed by bolt, convenient for operation and inspection
- Provide strength member holder to fix the main fiber cable
- Light gray cabinet
- Steel cabinet as optional
- Accept custom design and special order

Standard :

- Manufactured by ISO 9001-2015 company
- EEI tested and approved for IP65
- Meet AIS DTAC True requirements

Accessories :


- Cable tie, water proof connector
- Rear supporting bracket (without bolt)
- Adapter, pigtail, splice tray and fusion sleeve as optional

Dimensions :


- ODFWOA24U-V2 : 340 W x 128 D x 400 H mm
- ODFWOA60U-V2 : 390 W x 170 D x 480 H mm
- ODFWOA144U-V2 : 440 W x 200 D x 540 H mm



P/N : SNPOS2A1US



P/N : SNPOS4A1US



P/N : SNPOS8A1US

Adapter Capacity :

P/N	Dimensions (mm)			Maximum Fiber Cores	Snap Plate Type	Connector Type
	W	D	H			
ODFWOA24U-V2	340	128	400	24-48F (Snap Plate Slide 24 FC or SC)	Snap plate 24 (24F)	FC/ST/SC/E2000
					Snap plate 24 (48F)	LC Duplex SCF
ODFWOA60U-V2	390	170	480	60-120F (Snap Plate Slide 60 FC or SC)	Snap plate 60 (60F)	FC/ST/SC/E2000
					Snap plate 60 (120F)	LC Duplex SCF
ODFWOA144U-V2	440	200	540	144-288F (Snap Plate Slide 144 FC or SC)	Snap Plate 144 (144F)	FC/ST/SC/E2000
					Snap Plate 144 (288F)	LC Duplex SCF

Ordering Information :

P/N	Descriptions
ODFWOA24U-V2	ODF Wall O/D AL 24F (24-48F) Size 340x128x400 mm
ODFWOA60U-V2	ODF Wall O/D AL 60F (60-120F) Size 390x170x480 mm
ODFWOA144U-V2	ODF Wall O/D AL 144F (144-288F) Size 440x200x540 mm